ESMONTABLE
EMONTABLE
KNOK_DOWN

ÍNEA
IGNE
INE

Card of Product

AVD

1. GENERAL CHARACTERISTICS

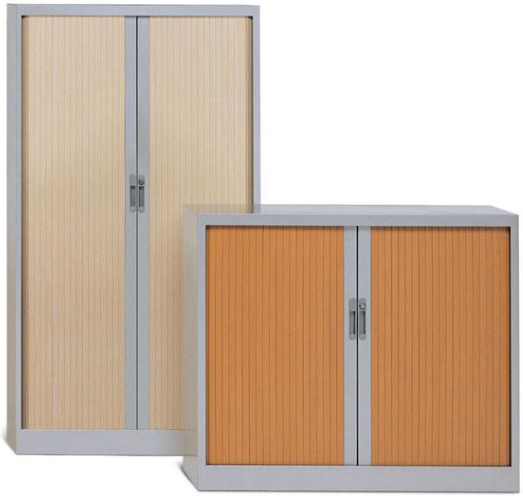

- **Cupboards made of cold-rolled sheet, with weld wire continue of copper of 0,7 - 0,8 mm** and for points to obtain an inflexibility and ideal stability.
- **Adjustable Structure external by means of 4 levelers**, except the cupboards 700 with adjustable levelers from the exterior.
- **Depth of 450 mm.**
- **Width 1200, 1020, 800, and 600 mm** according to model.
- Shelves endowed with guides for hanging folders. Exempting cupboards of 700, hillocks and clothiers the rest of models the top this one endowed with guides for hanging folders.
- **Blind of 30 mm** of width available in all the colors of GAPSA's color chart.
- Structures monoblock
- **Folding Key**.

1.1. Ended

Painting Finishes can be textured or smoothly

1.2. Structure

The cupboard is made by cold-rolled sheet of steel, of a thickness between 0,8 mm and 1,2 mm (depending on the part of the cupboard) by the reference faith - P01 equivalent to the European norm EN-10130, by a resistance of 38 kg to the mm. This one sheet is considered to be most adapted for the manufacture of this type of products, in view of his low content in carbon, which certain elasticity allows for conformations in right angle without never coming to the point of break, offering in turn a great conductibility for his union by means of weld for resistance.

1.3. Interior wings

- Interior panels of the cupboard, composed by sheet of cold-rolled band of low steel in quality carbon DC01, being the thickness of the same one of 0,8mm.
- Subordination of the interior panels of the cupboard both for the bottom and for the top.
- **Regulation of the shelf every 25mm**

1.4. Levelers

One of the most competitive principal advantages of the cupboard GAPSA is the use of the levelers in all his series. In concrete in the series AVD the leveling it is external, with what it allows the power to place the cupboard in the site that is wished and there same, without any manipulation of the same one, to be able to level it.

1.5. Closing

Closing that allows to obtain a highly ideal anticorrosion. Made of cold-rolled steel of 0,8mm of thickness. His system of assembly contributes a behavior of component of the blind on having been joined. The closing is composed by locks of 90 º by possibility of up to 600 combinations and main key.

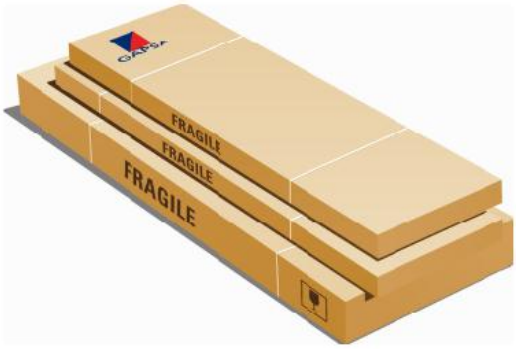

Drawer with ergonomic design to facilitate the opening and closing of the cupboard.

2. PAINTING

Superficial treatment of the cupboard before the process of application of the painting powder epoxi-polyester.

Painting: Covering in powder formulated with a mixture of resins epoxi-polyester with good mechanical and chemical properties.

*The spots of pen and permanent felt-tip pen will have to be cleaned immediately.

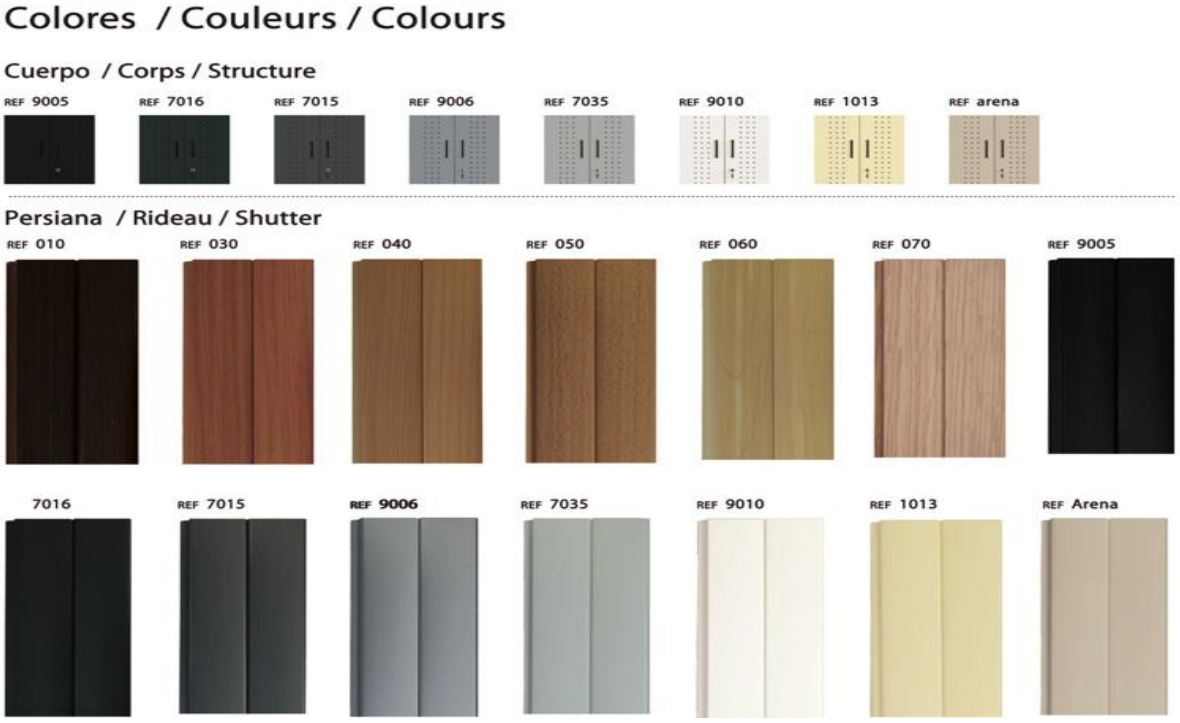

ECO-SYSTEM GAPSA

Raw material

Respectful suppliers with the environement in this manufacturing processes

Preference to recycled materials and painting without solvents

Maximum reduction of the mechanization residue

Productive process

Minimization of the resources consuption

Control of atmospheric emissions and spillages

Treatment of waster by means of installation filter system

Segregation of all generated residues

Identification of pieces by means of recyclability triangle

Painting liquidates without solvents and ponder painting without nanomaterials

Nosotros actuamos

Logistics

Suppliers with certified systems of environmental management

Maximum optimization of the utilization of space

Planning of routes with ecological orientation

End of life

Easy dismantlement of the cupboard

Marked pieces to promote and facilitate its recycling

High degree of cupboards recyclability

Useful life

Product designed for an easy repair

Sale of the second hand (reutilization)

Products designed for a long life

Environmental Certifications

ISO 14001
BUREAU VERITAS
Certification

NF ENVIRONNEMENT
NG-PP

Raw material

Productive process

Logystics

Useful life

End of life